




34025
SM-25

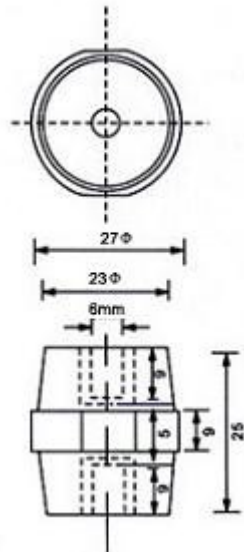


34035
SM-35

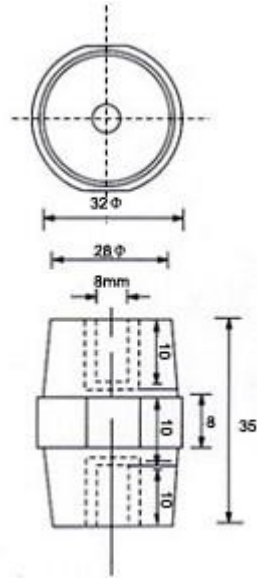


34040
SM-40

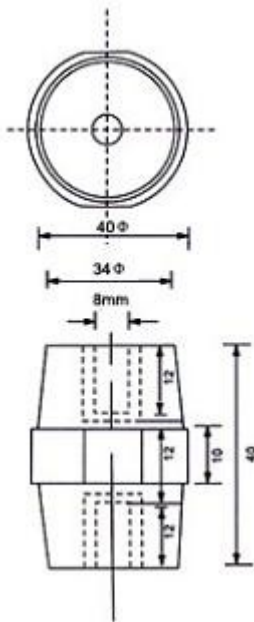

34051
SM-51

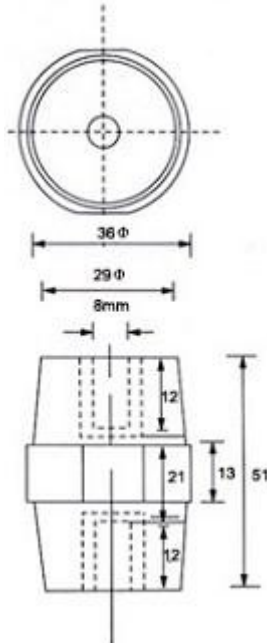

34076
SM-76

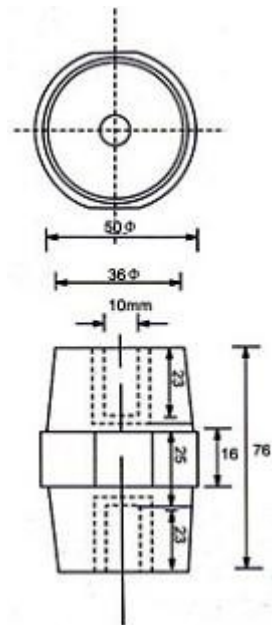



34025



34035



34040



34051



34076

Values	34025	34035	34040	34051	34076
Tensile strength(Lbs)	500	600	650	1000	1500
Torgue strength (FT/Lbs)	6	10	10	20	40
Voltage withstand(KV)	6	10	12	15	25
Screw(mm) x Step (mm)	6x1.0	8x1.25	8x1.25	8x1.25	10x1.5
Weight (G)	28	50	86	83	233