HF41F

SUBMINIATURE POWER RELAY

File No.: E133481



File No.: 40020043



File No.: CQC09002035072



Features

- Slim size (width 5mm)
- High breakdowm voltage 4kV (between coil and contacts)
- Surge voltage up to 6kV (between coil and contacts)
- Meeting VDE 0700, 0631 reinforce insulation
- High sensitive: 170mW
- Sockets available
- 1 Form A and 1 Form C configurations
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (28.0 x 5.0 x 15.0) mm

CONTACT DATA	
Contact arrangement	1A, 1C
Contact resistance	100m Ω (at 1A 6VDC) Gold plated: 30m Ω (at 1A 6VDC)
Contact material	AgSnO ₂ , AgNi
Contact rating (Res. load)	6A 250VAC/30VDC
Max. switching voltage	400VAC / 125VDC
Max. switching current	6A
Max. switching power	1500VA / 180W
Mechanical endurance	1 x 10 ⁷ ops
	1A: 6 x 10⁴ops (at 85°C)
Electrical endurance (UL Approval)	1C: (NO) 3 x 10 ⁴ ops (at 85°C)
(OL Approvar)	(NC) 1 x 10 ⁴ ops (at 85°C)

CHARACTERISTICS					
Insulation resistance		1000MΩ (at 500VDC)			
Dielectric Between		coil & contacts	4000VAC 1 min		
strength	Between open contacts		1000VAC 1 min		
Operate time (at nomi.volt.)		8ms max.			
Release time (at nomi.volt.)		4ms max.			
Shock resistance		Functional	49m/s ²		
		Destructive	980m/s ²		
Vibration resistance		10Hz to 55Hz 1mm DA			
Humidity		5% to 85% RH			
Ambient temperature		-40°C to 85°C			
Termination		PCB			
Unit weight		Approx. 5.4g			
Construction		Plastic sealed, Flux proofed			

Notes: 1) The data shown above are initial values.

- 2) Please find coil temperature curve in the characteristic curves below.
- 3) When install 1 Form C type of HF41F, please do not make the relay side with 5mm width down.

COIL	
Coil power	5VDC to 24VDC: 170mW
Coll power	48VDC, 60VDC: 210mW

COIL D	ATA			at 23°C
Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max. Allowable Voltage VDC	Coil Resistance Ω
5	3.75	0.25	7.5	147 x (1±10%)
6	4.50	0.30	9.0	212 x (1±10%)
9	6.75	0.45	13.5	476 x (1±10%)
12	9.00	0.60	18	848 x (1±10%)
18	13.5	0.90	27	1906 x (1±15%)
24	18.0	1.20	36	3390 x (1±15%)
48	36.0	2.40	72	10600 x (1±15%)
60	45.0	3.00	90	16600 x (1±15%)

Notes: When require pick-up voltage=70% nominal voltage, special order allowed.


SAFETY APPROVAL RATINGS			
UL/CUL	6A 30VDC		
	Resistive: 6A 277VAC		
	Pilot duty: R300		
	B300		
VDE	6A 30VDC		
	6A 250VAC		

Notes: Only some typical ratings are listed above. If more details are required, please contact us.



HONGFA RELAY ISO9001, ISO/TS16949 , ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2010 Rev. 1.00

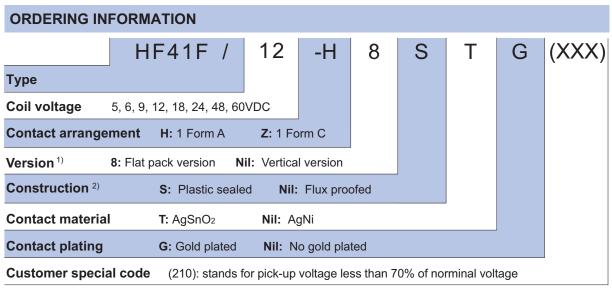


Notes: 1) We recommend flux proofed types for the flat pack version.

2) We recommend flux proofed types for a clean environment (free from contaminations like H2S, SO2, NO2, dust, etc.). We suggest to choose plastic sealed types and validate it in real application for an unclean environment (with contaminations like H₂S, SO₂, NO₂, dust, etc.).

If water cleaning is required after the relay is assembled on PCB, please contact us for suggestion about suitable parts.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

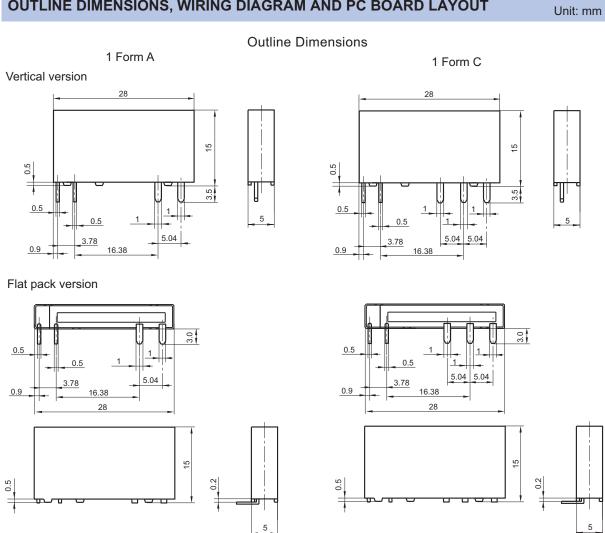



PCB Layout (Bottom view)

1 Form A


1 Form C


Vertical version






Flat pack version





Wiring Diagram (Bottom view)







Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤1mm, tolerance should be ±0.2mm; outline dimension >1mm and ≤5mm, tolerance should be ±0.3mm; outline dimension >5mm, tolerance should be ±0.4mm.


2) The tolerance without indicating for PCB layouts is always ±0.1mm.

CHARACTERISTIC CURVES

MAXIMUM SWITCHING POWER







Percentage Of Nominal Coil Voltage

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.